



# TPL 121250

## 12V 125.0Ah


TPL 121250 is a general purpose battery with 10 years expected life under normal float charge. As with all CSB batteries, all are rechargeable, highly efficient, leak proof and maintenance free.

### Specification

Nominal Voltage	12
Capacity <sub>25°C(77°F)</sub>	125Ah @ 8hr-rate to 1.75V per cell
Dimensions	Height : 321.3mm(12.6inch)
	Length : 557mm(21.9inch)
	Width : 124.8mm(4.90inch)
Weight	Approx. 47kg(103.4 lbs)
Internal Resistance	Approx. 4mΩ
Flame Retardant Container / Cover UL - Laboratories Rating	UL94-V0(PP)/L.O.I higher than 28 .
Float Charging <sub>25°C(77°F)</sub>	2.275±0.025V/cell Temperature Coefficient -3.3mV/°C(1.8mV/°F)
Maximum Discharge Current in 5 seconds	800A
Maximum Charge Current(C/5)	37.5A
Service Temperature Range	Discharge: -20°C~50°C(-4°F~122°F)
	Charge: -20°C~50°C(-4°F~122°F)
	Storage: -20°C~40°C(-4°F~104°F)
Terminal Type	Thread copper alloy insert terminal to accept 1/4"-20bolt
Terminal Hardware Initial Torque	110-in-lbs.(12.4 N-m)

CSB-manufactured batteries are UL-recognized components under UL924 and UL1989. CSB is also certified by ISO 9001 and ISO 14001.

### Dimensions

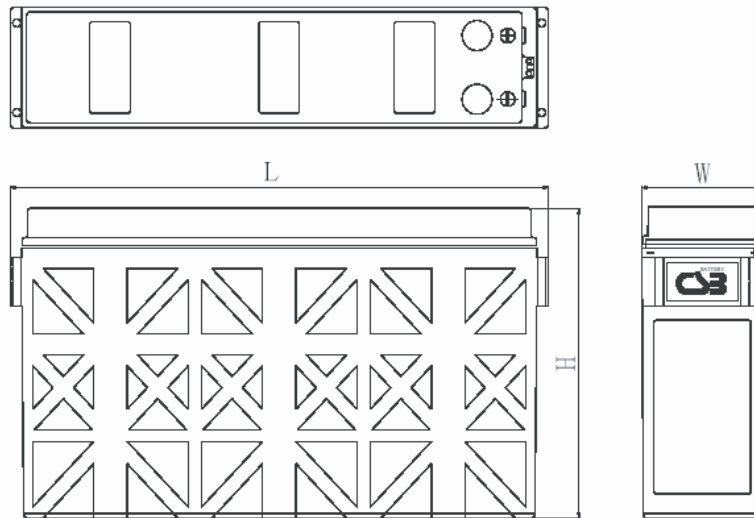

### Constant Current Discharge Characteristics Unit:Amperes (25°C,77°F)


F.V/Time	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	6HR	7HR	8HR	10HR	20HR
1.67V	231.88	147.27	86.33	50.16	36.95	29.77	24.69	21.10	18.36	16.25	13.28	6.95
1.70V	222.34	144.38	85.55	49.61	36.56	29.38	24.38	20.78	18.13	15.94	13.13	6.88
1.75V	205.94	137.58	83.98	48.83	35.55	28.52	23.44	20.00	17.50	15.63	12.81	6.72
1.80V	185.39	129.22	80.47	47.50	34.45	27.19	22.66	19.53	16.95	15.08	12.42	6.56
1.83V	168.91	121.64	77.11	46.17	33.20	26.41	22.03	18.98	16.48	14.61	12.03	6.41
1.85V	158.83	116.72	74.45	45.08	32.42	25.86	21.48	18.52	16.17	14.38	11.88	6.25
1.90V	131.33	98.20	64.30	40.08	29.53	23.44	19.53	16.64	14.69	13.13	10.86	5.78

### Constant Power Discharge Characteristics Unit:Watts (25°C,77°F)


F.V/Time	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	6HR	7HR	8HR	10HR	20HR
1.67V	2,461.35	1,590.47	946.16	557.24	414.24	335.01	278.60	238.27	207.55	183.79	150.34	78.92
1.70V	2,379.08	1,573.69	945.29	556.12	413.34	333.41	277.27	236.59	206.53	181.69	149.76	78.65
1.75V	2,244.72	1,521.61	942.72	554.93	407.37	328.07	270.12	230.80	202.13	180.47	148.11	77.87
1.80V	2,059.69	1,450.48	917.34	548.63	400.17	317.01	264.63	228.32	198.35	176.49	145.46	77.04
1.83V	1,898.51	1,379.40	889.46	538.13	388.97	310.41	259.31	223.64	194.35	172.32	142.03	75.79
1.85V	1,800.32	1,334.10	863.66	528.54	382.09	305.66	254.27	219.32	191.64	170.42	140.90	74.31
1.90V	1,510.27	1,141.61	757.10	476.73	352.90	280.66	234.18	199.69	176.32	157.63	130.53	69.61

• All mentioned values are average values.

### Trickle (or Float) Service Life


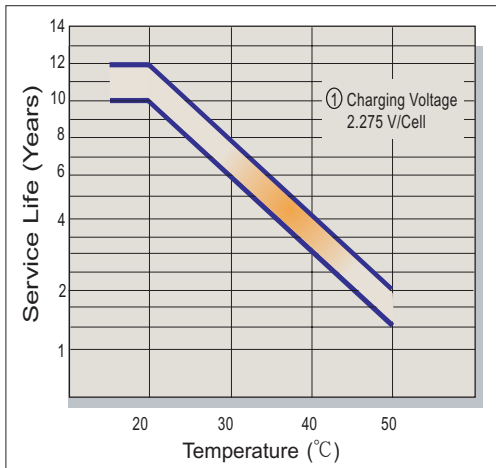


### Capacity Retention Characteristic

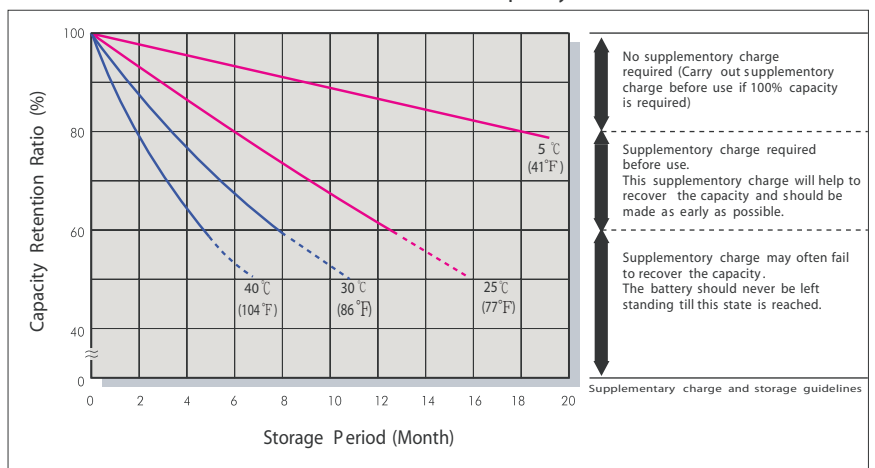


Battery Voltage and Charge Time for Standby Use

Terminal Voltage (V) and Discharge Time (25°C/77°F)

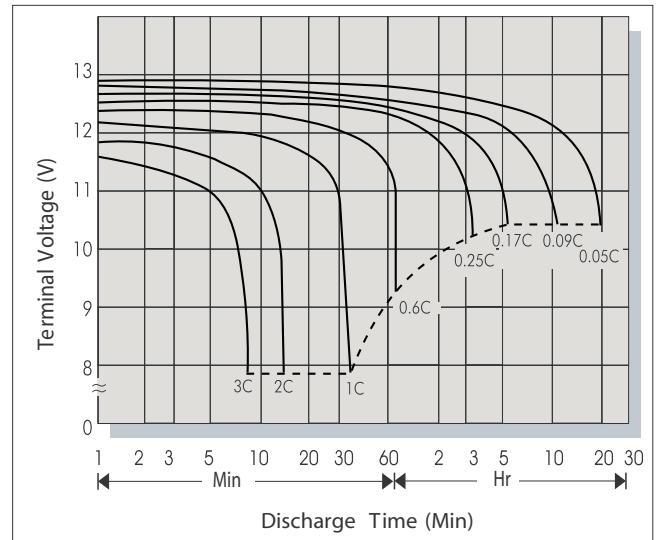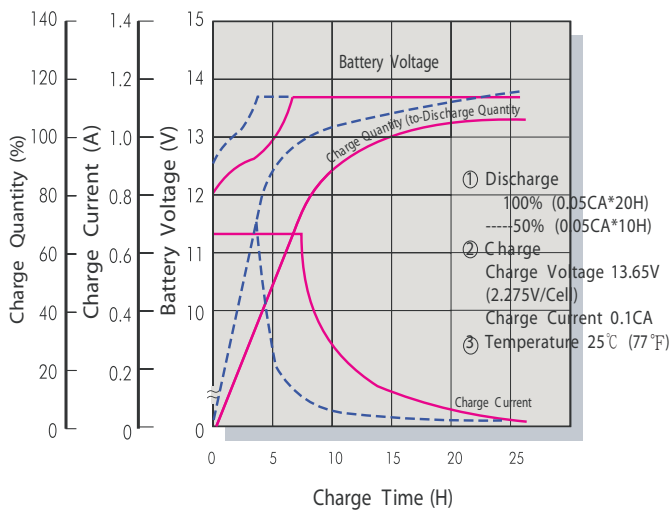

Battery Voltage and Charge Time for Cycle Use

Discharge Current VS. Discharge Voltage

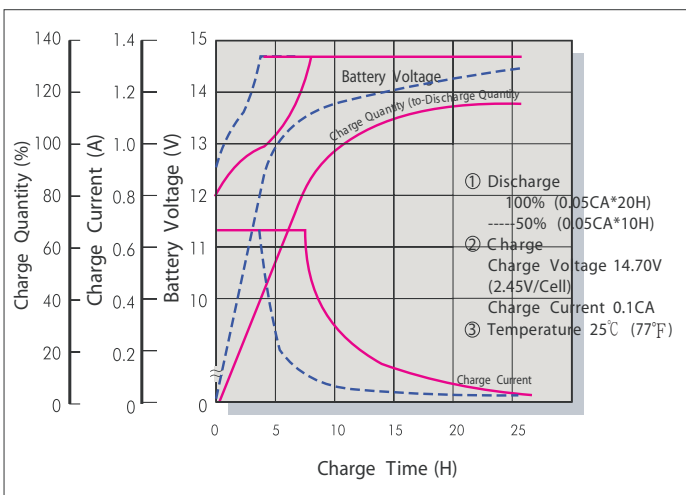

Final Discharge Voltage V/Cell	1.75	1.70	1.55	1.30
Discharge Current (A)	0.2C >(A)	0.2C <(A)<0.5C	0.5C <(A)<1.0C	(A)>1.0C

### Charging Procedures

Application	Charge Voltage (V/Cell)			Max. Charge Current
	Temperature	Set Point	Allowable Range	
Cycle Use	25°C(77°F)	2.45	2.40~2.50	0.3CA
Standby	25°C(77°F)	2.275	2.25~2.30	

Sales Office [URL:WWW.CSB-BATTERY.COM](http://www.csb-battery.com)

**CSB BATTERY CO., LTD.**  
**TAIWAN OFFICE**  
 Tel: +886-2-8751-5000  
 Fax: +886-2-8751-6161  
 E-mail: service@csb-battery.com.tw

**CSB BATTERY OF NETHERLANDS B.V**  
**NETHERLANDS OFFICE**  
 Tel: +31(0) 180 418 140  
 Fax: +31(0) 180 418 327  
 E-mail: eurosales@csb-battery.com

**CSB BATTERY LOGISTICS (SHANGHAI) CO., LTD.**  
**SHANGHAI OFFICE**  
 Tel: +86-21-5046-1622, 5046-0833  
 Fax: +86-21-5064-3314

**CSB BATTERY TECHNOLOGIES, INC.**  
**USA OFFICE**  
 Tel: +1-817-244-7777/1-8003 CSBUSA(272872)  
 Fax: +1-817-244-4445  
 E-mail: csb@csb-battery.com

**CSB BATTERY LOGISTICS (SHANGHAI) CO., LTD.**  
**BEIJING OFFICE**  
 Tel: +86-10-6597-8060, 6597-8070  
 Fax: +86-10-6597-8050  
 E-mail: chinasis@csb-battery.com

**CSB BATTERY LOGISTICS (SHANGHAI) CO., LTD.**  
**SHENZHEN OFFICE**  
 Tel: +86-755-2694-2788/2606/2706  
 Fax: +86-755-2694-2748  
 E-mail: she@csb-battery.com.tw